



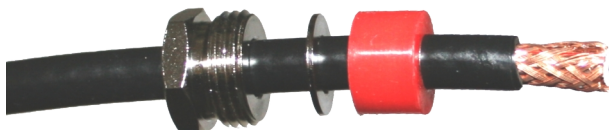




# Mounting instruction



## Aircell<sup>®</sup> 5

N plug / Item no.: 7700

[www.ssb-electronic.com](http://www.ssb-electronic.com)

Required tools: 2 x open-ended spanner 11 mm 1 x cutter knife 1 x scissors 1 x soldering station + solder		1		Cut off cable tail right-angled.
2		3		Remove 8 mm of the outer jacket with the cutter knife.
4		5		Use a cutter knife to remove 6 mm of the copper foil and 5 mm of the dielectric foam.
6		7		Tighten the clamping nut hand-tight using the two open-ended wrenches. A gap of 0,5 to 1,0 mm must still be visible between the nut and the connector housing!
Place the inner pin on the conductor and solder through the hole. The distance between the inner pin and the copper foil should be 1 mm (otherwise risk of short circuit!). Push the prepared cable end into the connector housing as far as it will go (click).				